www.e-hanse.com



LED Flat Panel Light (vertical 직하형 타입)


LONG LIFE LED APPLIED RUNALUX-Ver.10

runalux lighting provide competitive price and unique design as well as en-vironmentally friendly atmosphere to maximize product value


vertical



RunaLux: HS-HV1230 (vertical)

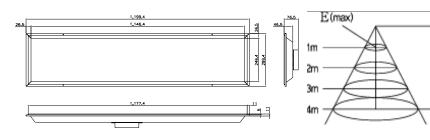

H(M)	D(lx)
2	300
3	133
4	75



► FUNDAMENTAL

Rated Input Voltage (입력전압)	AC100-240V, 50/60Hz
LED PowerConsumption (소비전력)	50W
Luminous Flux(광속)	4,000lm
CCT (색온도)	6000K(CW), 3500K(WW)
CRI (연색성)	min 80/85/90
Beam Angle (빔각도)	120°
Operating Temperature (동작 온도)	-20°C∼85°C
Out Dimmension (W x H x T)	1199.4mm x 299.4mm x 48.5mm
Weight (무게)	7 kg
Control method	IR Remote controller (*DALI Dimming)
IP	30

**Power supply : UL,CE Registered Certificates