



● LED Lighting (LED 조명)

## LED Flat Panel Light (side edge 타입)

**LONG LIFE LED APPLIED**  
R U N A L U X - v e r . 1 0

runalux lighting provide competitive price and unique design as well as environmentally friendly atmosphere to maximize product value



• side edge



Ⓐ



### Ⓐ RunaLux : HS-HE330 (side edge)

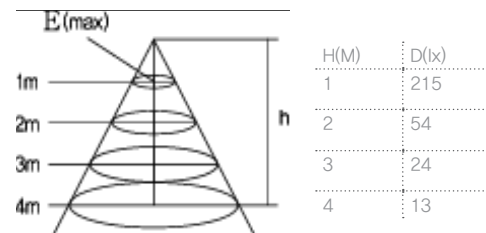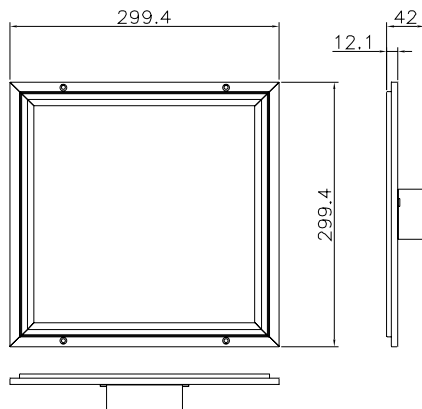

#### ▶ FUNDAMENTAL

Rated Input Voltage (입력전압)	AC100~240V, 50/60Hz
LED PowerConsumption (소비전력)	13W
Luminous Flux(광속)	715lm
CCT (색온도)	6000K(CW) , 3500K(WW)
CRI (연색성)	min 80/85/90
Beam Angle (빔각도)	120°
Operating Temperature (동작 온도)	-20℃~85℃
Out Dimension (W x H x T)	300mm x 300mm x 13mm
Weight (무게)	2.3 kg
Control method	IR Remote controller (※DALI Dimming)
IP	30

※Power supply : UL,CE Registered Certificates