



- LED Lighting (LED 조명)

LED Flat Panel Light (side edge 타입)



LONG LIFE LED APPLIED
R U N A L U X - ver.10

runalux lighting provide competitive price and unique design as well as environmentally friendly atmosphere to maximize product value


- side edge



② RunaLux : HS-HE1230 (side edge)

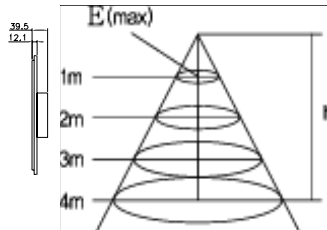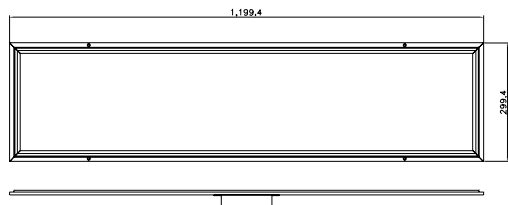

H(M)	D(x)
1	825
2	206
3	92
4	52

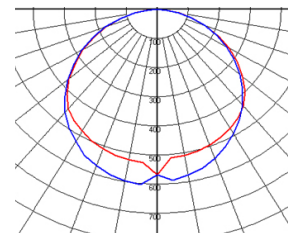

▶ FUNDAMENTAL

Rated Input Voltage (입력전압)	AC100~240V, 50/60Hz
LED PowerConsumption (소비전력)	50W
Luminous Flux(광속)	2,750lm
CCT (색온도)	6000K(CW) , 3500K(WW)
CRI (연색성)	min 80/85/90
Beam Angle (빔각도)	120°
Operating Temperature (동작 온도)	-20℃~85℃
Out Dimension (W x H x T)	1200mm x 300mm x 13mm
Weight (무게)	6 kg
Control method	IR Remote controller (※DALI Dimming)
IP	30

※ Power supply : UL,CE Registered Certificates