




- LED Lighting (LED 조명)

LED Flat Panel Light (side edge 타입)


LONG LIFE LED APPLIED
R U N A L U X - v e r . 1 0

runalux lighting provide competitive price and unique design as well as environmentally friendly atmosphere to maximize product value


- side edge

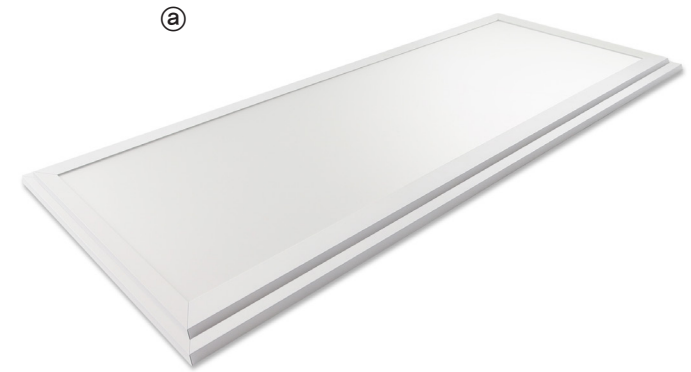

Ⓐ RunaLux : HS-HE1260 (side edge)

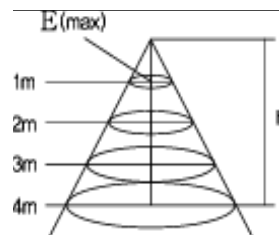

H(M)	D(x)
1	1188
2	297
3	132
4	74

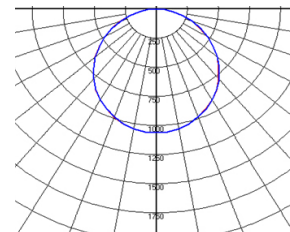

▶ FUNDAMENTAL

Rated Input Voltage (입력전압)	AC100~240V, 50/60Hz
LED PowerConsumption (소비전력)	72W
Luminous Flux(광속)	3,960lm
CCT (색온도)	6000K(CW) , 3500K(WW)
CRI (연색성)	min 85
Beam Angle (빔각도)	120°
Operating Temperature (동작 온도)	-20℃~85℃
Out Dimmension (W x H x T)	1200mm x 600mm x 13mm
Weight (무게)	9.5 kg
Control method	IR Remote controller (※DALI Dimming)
IP	30

※Power supply : UL,CE Registered Certificates