



● LED Lighting (LED 조명)


LED Fluorescent (형광등)

LONG LIFE LED APPLIED
R U N A L U X - ver.10

runalux lighting provide competitive price and unique design as well as environmentally friendly atmosphere to maximize product value



G13 Base

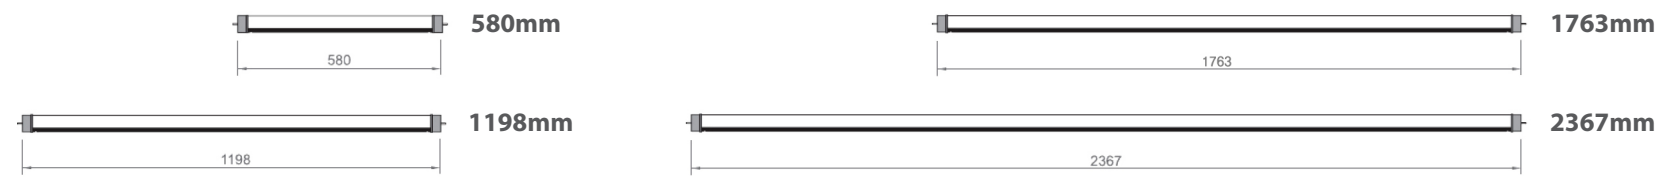

① RunaLux : HS-STLE

HS-STLE600				HS-STLE1200				HS-STLE1800				HS-STLE2400			
compare item	Original 20W fluorescent light	LED fluorescent light	energy	compare item	Original 40W fluorescent light	LED fluorescent light	energy	compare item	Original 70W fluorescent light	LED fluorescent light	energy	compare item	Original 110W fluorescent light	LED fluorescent light	energy
Power Consumption	18W	13W	30%	Power Consumption	38W	22W	40%	Power Consumption	65W	40W	40%	Power Consumption	100W	45W	50%
Co2/year(1day=10H)	26.28kg	18.98kg	-7.3kg	Co2/year(1day=10H)	55.48kg	33.58kg	-21.9kg	Co2/year(1day=10H)	94.9kg	58.4kg	-36.5kg	Co2/year(1day=10H)	146kg	70.08kg	-75.92kg

■ BASE : G13 Base

Model	Size(mm)	Weight(g)	Luminous Flux	Efficiency(lm/w)	Intensity of Illumination(1M)	Intensity of Illumination(2M)	Color Temperature(K)	Radiation Angle(Deg)	CRI	LED Power Consumption	Power Factor	Rated Input Voltage	Lifetime(Hr)	Operating Temperature	Certification
HS-STLE600	∅ 30X580	190	1,209 lm	93	290 lux	72.5 lux	3000K,3500K, 4000K,5500K,6000K	140deg	min 80~ / 85~ / 90~	13W	No less > 0.9	AC100-240V, 50/60Hz	50,000 (Ta=25°C, Open fixture)	-20~85°	RoHS/green certification CE
HS-STLE900	∅ 30X893	250	1,674 lm	93	390 lux	97.5 lux			min 80~ / 85~ / 90~	18W					
HS-STLE1200	∅ 30X1198	320	2,068lm	94	480 lux	120 lux			min 80~ / 85~ / 90~	22W					
HS-STLE1500	∅ 30X1498	380	3384 lm	94	570lux	142.5 lux			min 80~ / 85~ / 90~	36W					
HS-STLE1800	∅ 30X1763	450	3,760 lm	94	660 lux	165 lux			min 80~ / 85~ / 90~	40W					
HS-STLE2400	∅ 30X2367	590	4,140 lm	92	760 lux	190 lux			min 80~ / 85~ / 90~	45W					